

Specifications TLAS115HT4MPBK

Electrical Specifications

| | |
|----------------------|-------------------|
| Model No. | TLAS115HT4MPBK |
| Power (W) $\pm 10\%$ | 115 W |
| Input Voltage (V) | 200-480V, 50/60Hz |
| Efficacy | 169 lm/W |
| Power Factor (PF) | 0.9 |
| Dimmable | 0-10V |
| Replace MH/HPS | 300 W |

Photometric Specifications


| | |
|--------------|-------------------------|
| CRI | 70 |
| CCT | 5 000 K |
| Beam angle | Type IV Medium (119.4°) |
| Light Output | 19 435 lm |
| BUG rating | B3-U0-G3 |

Mechanical Specifications

| | |
|-----------------------|--|
| IP Rating | IP66 |
| Material | Aluminum |
| Lentille | PC |
| Net Weight | 4.8 kg |
| Product size (mm) | 585 x 270 x 56 mm |
| Product size (inch) | $\pm 23 \times 11 \times 2 \frac{1}{4}$ in |
| Operating Humidity | 10% - 90% |
| Operating Temperature | -35°C ~ 45°C |




Easy distribution change

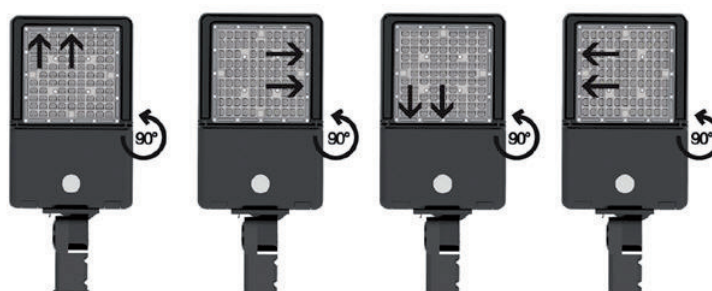

Shown bracket model: TLASSFPK. Bracket not included. Pictures for illustration purpose only.

Available brackets

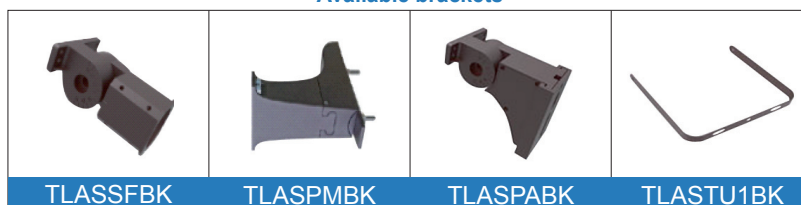

Product Description:

1. Light and slim housing.
2. Optional photocell and motion sensor.
3. Easily replace traditional MH or HPS luminaire fixture.
4. Powerful light efficacy. 160 Lm/W and +
5. Save in electricity consumption compared to fluorescent lighting fixture.
6. 3 000 K, 4 000 K and 5 700 K available on special request.
7. Color: Black.
Other colors available on special request.
8. Warranty: 5 Years.

Applications:

Outdoor parking and wide area.

info@technilight.ca

WWW.TECHNILIGHT.CA