


Canopy



CCT adjustable (3000K, 4000K, 5000K)
Watt adjustable

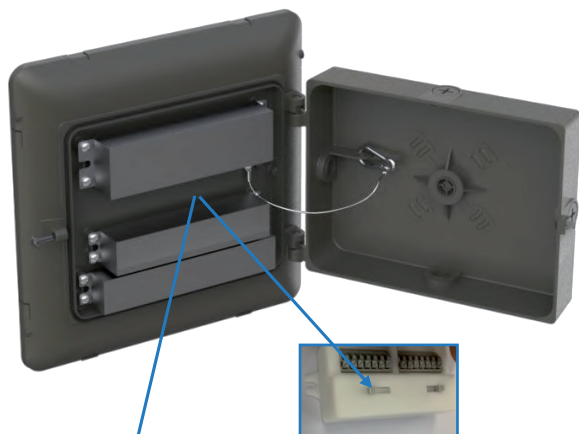

Specifications TLCAUSF45ABK

Electrical Specifications

Model No.	TLCAUSF45ABK
DLC ID	S-3TIE7C
Power (W) ± 10% adjustable	23 W / 34 W / 45 W
Input Voltage (V)	120-347 V, 50/60 Hz
Efficacy ± 3%	130 lm/W
Power Factor (PF)	0.9
Surge protection	4 Kv
Total harmonic distortion	20%

Photometric Specifications

CRI	70
CCT adjustable	3000K / 4000K / 5000K
Beam angle	120°
Light Output ± 3%	23W: 2990 lm 34W: 4420 lm 45W: 5850 lm
Dimmable	0-10V

Mechanical Specifications

IP Rating	IP65
Material	Aluminum
Lens	Frosted (Glass)
Net Weight	2.7 kg
Product size (mm)	± 268 x 268 x 77.5 mm
Product size (inch)	± 10.6 x 10.6 x 3.1 in
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 45°C
Lifespan (L70)	60 000 hours



Accessories not included

	Wire guard		Bird guard
TLCAWG		TLCABGBK	
	Presence detector		Remote control setting for presence detector
HD015VCRH		HD05R	

Product description:

- Large supply voltage range 120-347V.
- 3000K / 4000K / 5000K adjustable CCT.
- 23W / 34W / 45W adjustable power.
- Lightweight lamp body for easier installation in high ceiling areas.
- Smooth surface structure prevents accumulation of water, dust and insects.
- Optional motion sensor.
- Remote control for motion sensor optional.
- Big energy saving compared to conventional lights with similar lumen output.

Applications:

Garages, gas stations, lean-to, stairwells, etc.