


Fixing aluminium plate available.
Not included.

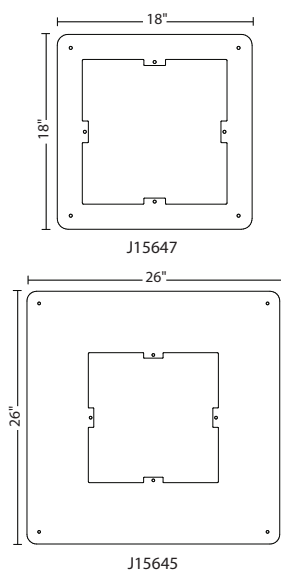

Pictures for illustration purpose only

Specifications TLDL392WV1P

Electrical Specifications

Model No.	TLDL392WV1P
Power (W) $\pm 10\%$	85 W
Input Voltage (V)	AC120-277V, 50/60Hz
Efficacy	109.79 lm/W
Power Factor (PF)	0.9963

Photometric Specifications

CRI	≥ 80
CCT	5 000 K
Beam angle	108.8°
Light Output	9 325 lm
Dimmable	1-10V & Triac

Mechanical Specifications

IP Rating	IP65
Material	Die cast aluminium
Lens	Clear Flat PC
Net Weight	11.6 kg
Product size (mm)	355.6 x 355.6 x 117 mm
Product size (inch)	$\pm 14 \times 14 \times 4.6$ in
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C

Product Description:

1. Die cast aluminium housing for rugged mounting and heat dissipation.
2. Surface mount with quick installation kits and an aluminium plate.
3. No toxic chemicals/ROHS compliant.
4. Save up in electricity consumption compared to fluorescent lighting fixture.
5. Warranty: 5 Years.
6. It could be fitted with sensor.
7. 3 000 K and 5 000 K available on special request.
8. Color: white.

Applications:

Gas stations, workshops, warehouses, factories, markets, etc.
Designed for wet locations. Indoor and outdoor.

Similar product	Color	W	Lumen
TLDL40N	4 000 K	40 W	5 530 lm
TLDL80N	4 000 K	80 W	10 179 lm

info@technilight.ca

WWW.TECHNILIGHT.CA