




Pictures for illustration purpose only

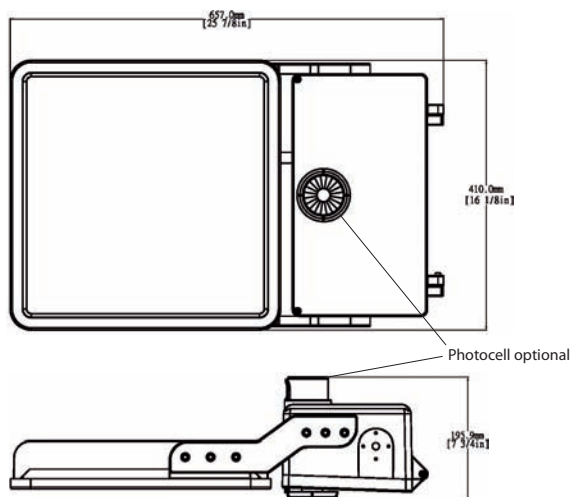

Specifications TLFL280HPMPBK

Electrical Specifications

Model No.	TLFL280HPMPBK
Power (W) $\pm 10\%$	280 W (DLC: 284.5 W)
Input Voltage (V)	AC347/480V, 50/60Hz
Efficacy	147.68 lm/W
Power Factor (PF)	0.95

Photometric Specifications

CRI	76.2
CCT	5 000 K
Beam angle	111.9°
Light Output	42 015 lm
Dimmable	1-10V

Mechanical Specifications

IP Rating	IP65
Material	Die cast aluminium
Lens	Clear (Tempered glass)
Net Weight	18 kg
Product size (mm)	657 x 410 x 195.9 mm
Product size (inch)	$\pm 25\text{-}7/8 \times 16\text{-}1/8 \times 7\text{-}3/4$
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C

Product Description:

1. Mounting option: PM (Pole Mount straight).
2. Various mounting options available.
(TU, SF, PM and TR)
3. Photocell optional.
4. Clear, flat tempered glass lens, water-resistant.
5. Save on electricity consumption compared to fluorescent lighting fixture.
6. Color: black.
Other colors available on special request.
7. Warranty: 5 Years.
8. It could be fitted with sensor.
9. 3 000 K, 4 000 K available on special request.

Applications:

Designed for use in wet locations.
Architectural flood luminaire.

Similar products	Color	W	Lumen
TLFL280PMPBK	5 000 K	280 W	42 261 lm
TLFL280HTRPBK	5 000 K	280 W	43 015 lm
TLFL320HTUPBK	5 000 K	320 W	41 669 lm