



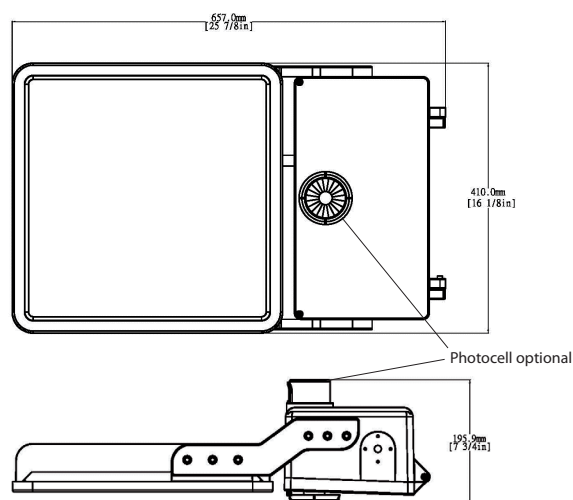

Picture for illustration purpose only



Specifications TLFL320HTUPBK

Electrical Specifications

Model No.	TLFL320HTUPBK
Power (W) $\pm 10\%$	320 W (DLC: 317.6 W)
Input Voltage (V)	AC347/480V, 50/60Hz
Efficacy	131.2 lm/W
Power Factor (PF)	0.96

Photometric Specifications

CRI	75.3
CCT	5000 K
Beam angle	111.9°
Light Output	41 669 lm
Dimmable	1-10V & Triac

Mechanical Specifications

IP Rating	IP65
Material	Die cast aluminium
Lens	Clear (Tempered glass)
Net Weight	14.5 kg
Product size (mm)	657 x 410 x 195.9 mm
Product size (inch)	$\pm 25\text{-}7/8 \times 16\text{-}1/8 \times 7\text{-}3/4$
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C

Product Description:

1. Mounting option: TU (Big Trunnion).
2. Various mounting options available. (TU, SF, PM and TR)
3. Photocell optional.
4. Clear, flat tempered glass lens, water-resistant.
5. Save on electricity consumption compared to fluorescent lighting fixture.
6. Color: black.
Other colors available on special request.
7. Warranty: 5 Years.
8. It could be fitted with sensor.
9. 3000K, 4000K available on special request.

Applications:

Designed for use in wet locations.
Architectural flood luminaire.

Similar products	Color	W	Lumen
TLFL320TUPBK	5000 K	320 W	43 386 lm
TLFL320HSFPBK	5000 K	320 W	41 669 lm
TLFL320HTRPBK	5000 K	320 W	41 669 lm