




Pictures for illustration purpose only

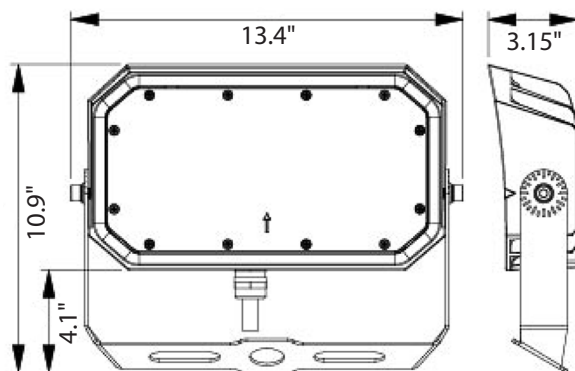

Specifications TLFLF100TUPBK

Electrical Specifications

Model No.	TLFLF100TUPBK
DLC ID	PL653F5YWZF7
Power (W) $\pm 10\%$	100 W (DLC: 101.1 W)
Input Voltage (V)	AC 120/277V, 50/60Hz
Efficacy $\pm 3\%$	134.03 lm/W
Power Factor (PF)	0.974
Total harmonic distortion	8.62%

Photometric Specifications

CRI	72.4
CCT	5 000 K
Beam angle	80° x 110°
Light Output $\pm 3\%$	13 550 lm
Dimmable	No

Mechanical Specifications

IP Rating	IP65
Material	Die cast aluminum
Lens	Polycarbonate
Net Weight	6.5 kg
Product size (mm)	$\pm 330 \times 254 \times 76$ mm
Product size (inch)	$\pm 13.4 \times 10.9 \times 3.15$ in
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 45°C
Lifespan (L70)	72 000 hours

Product Description:

1. Mounting option: TU ("U" bracket)
2. 3 mounting options available.
(SF and SW optional only. Not included.)
3. Built with materials that have little expansion at the temperature. Stay waterproof to -40°C.
4. Save on electricity consumption compared to standard lighting fixture.
5. Color: black.
6. Warranty: 5 Years.
7. 18" power cord.

Applications:

Designed for use in wet locations.
Flood luminaire.

Similar products	Color	W	Lumen
TLFLF15TUPBK	5 000 K	15 W	1 800 lm
TLFLF30TUPBK	5 000 K	30 W	3 600 lm
TLFLF50TUPBK	5 000 K	50 W	6 000 lm