
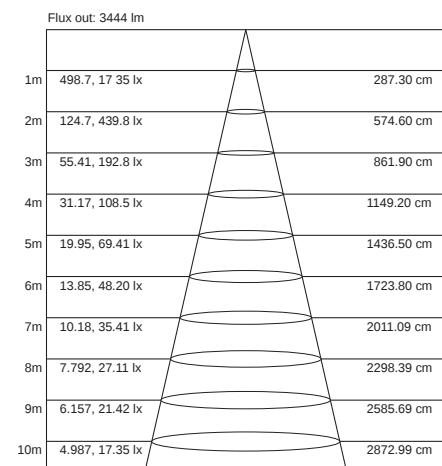


Photometric data


Picture for illustration purpose only

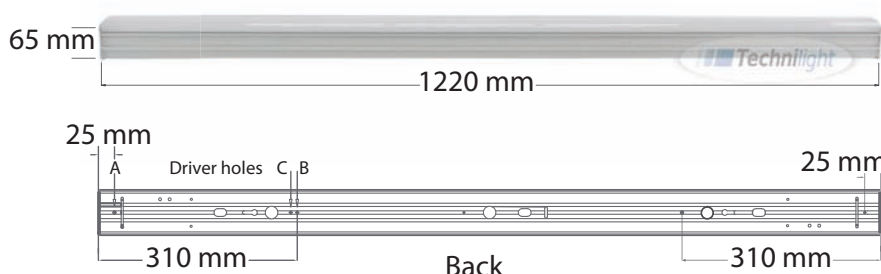

Specifications TLSMA4F40ND

Electrical Specifications

Model No.	TLSMA4F40ND
Power (W) $\pm 10\%$	40 W (DLC 39.59 W)
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy	138.42 lm/W
Power Factor (PF)	0.9

Photometric Specifications

CRI	>80
CCT	4 000 K
Beam angle	120°
Light Output	5 480 lm
Dimmable	0-10V

Mechanical Specifications

IP Rating	IP20
Material	Aluminium and Polycarbonate
Lens	Frosted
Net Weight	2.1 kg
Product size (mm)	1 220 x 67.5 x 65
Product size (inch)	$\pm 48 \times 2-10/16 \times 2-1/2$
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 40°C

Product Description:

1. Easy Installation with fast connection design, shorten the installation process and save labor cost.
2. Save up in electricity consumption compared to fluorescent lighting fixture.
3. Warranty: 5 Years.
4. It could be fitted with sensor.
5. 2 700 K, 3 000 K and 5 000 K available on special request.
6. Ceiling installation or optionnal suspension kit, not included.
7. The B model hides the location of the old traditional ceiling luminaire.

Applications:

Suitable for houses, basements, warehouses, garages, shops, etc.

Similar products	Color	W	Lumen
TLSMA4F30ND	4 000 K	30 W	4 112 lm
TLSMA4F30PD	5 000 K	30 W	4 150 lm
TLSMA4F40PD	5 000 K	40 W	5 669 lm

info@technilight.ca

WWW.TECHNILIGHT.CA