




Picture for illustration purpose only

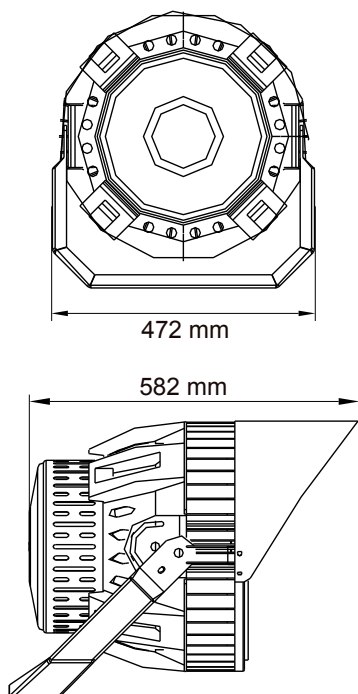

Specifications **TLSP1000PBK**

Electrical Specifications

Model No.	TLSP1000PBK
Power (W) $\pm 10\%$	1 000 W (DLC: 1 007.4 W)
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy	126.1 lm/W
Power Factor (PF)	0.937

Photometric Specifications

CRI	70.3
CCT	5 000 K
Beam angle	15° / 20° / 25° / 40° / 60° / 80°
Light Output	126 999 lm
Dimmable	0-10 V

Mechanical Specifications

IP Rating	IP66
Material	Aluminum
Lens	PC
Net Weight	27 kg
Product size (mm)	Ø472 x 582 mm
Product size (inch)	Ø18 9/16 x 22-15/16 po
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C

Product description:

1. Robust and solid design.
2. Good radiator ventilation that improves heat management and ensures the stability of the lighting system.
3. Available in multiple beam angles for narrow projection.
4. Economy on electricity consumption compared to traditional lighting fixture.
5. 3 000 K, 4 000 K and 5 700 K available on special request.
6. Warranty: 5 years.

Applications:

Projector.
Stadiums, race track, playgrounds, large area parkings, construction sites, etc.

Similar products	Color	W	Lumen
TLSP500PBK	5 000 K	500 W	64 379.3 lm
TLSP750PBK	5 000 K	750 W	95 221.8 lm
TLSP1250PBK	5 000 K	1 250 W	158 624 lm

info@technilight.ca

WWW.TECHNILIGHT.CA