




Picture for illustration purpose only

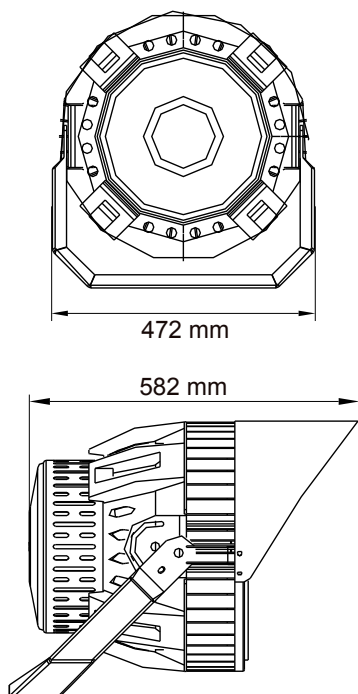

Specifications TLSP1250HPBK

Electrical Specifications

Model No.	TLSP1250HPBK
Power (W) $\pm 10\%$	1 250 W (DLC: 1 251.3 W)
Input Voltage (V)	AC200-480V, 50/60Hz
Efficacy	127.5 lm/W
Power Factor (PF)	0.939

Photometric Specifications

CRI	70
CCT	5 000 K
Beam angle	15° / 20° / 25° / 40° / 60° / 80°
Light Output	159 544 lm
Dimmable	0-10 V

Mechanical Specifications

IP Rating	IP66
Material	Aluminum
Lens	PC
Net Weight	27 kg
Product size (mm)	Ø472 x 582 mm
Product size (inch)	Ø18 9/16 x 22-15/16 po
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C

Product description:

1. Robust and solid design.
2. Good radiator ventilation that improves heat management and ensures the stability of the lighting system.
3. Available in multiple beam angles for narrow projection.
4. Economy on electricity consumption compared to traditional lighting fixture.
5. 3 000 K, 4 000 K and 5 700 K available on special request.
6. Warranty: 5 years.

Applications:

Projector.
Stadiums, race track, playgrounds, large area parkings, construction sites, etc.

Similar products	Color	W	Lumen
TLSP500HPBK	5 000 K	500 W	65 182.7 lm
TLSP750HPBK	5 000 K	750 W	96 209.3 lm
TLSP1000HPBK	5 000 K	1 000 W	128 137 lm

info@technilight.ca

WWW.TECHNILIGHT.CA