






**Selectable CCT: 3500K, 4000K and 5000K**  
**Selectable Power: 15W, 18W, 22W and 25W**

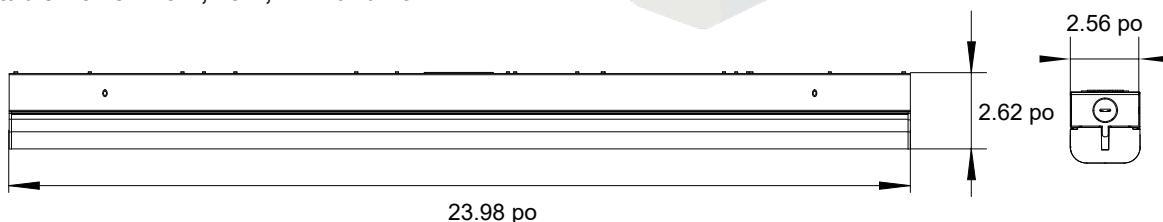

Removable plate  
for easy connection

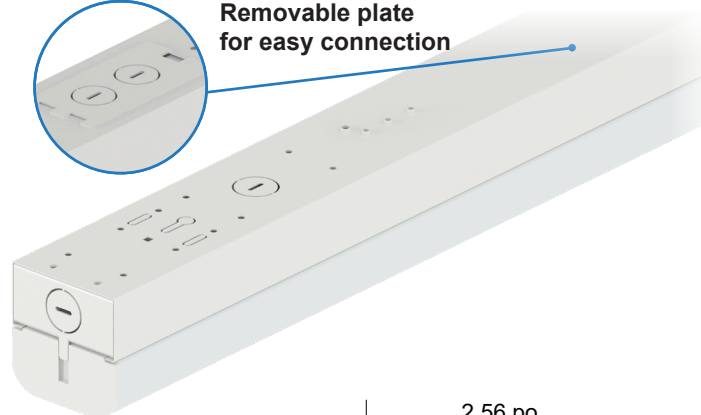

**RoHS**



## Specifications TLSUS2F25AD

### Electrical Specifications

Model No.	TLSUS2F25AD
DLC ID	PBNKUOGN
Power (W) selectable $\pm 10\%$	15W - 18W - 22W - 25W
Input Voltage (V)	AC 120/347V, 50/60Hz
Efficacy $\pm 3\%$	127 lm/W
Power Factor (PF)	0.9
Surge protection	1 Kv
Total harmonic distortion	15 %

### Photometric Specifications

CRI	80
CCT selectable	3500K / 4000K / 5000K
Beam angle	120°
Light Output $\pm 3\%$	15W: 1905 lm    18W: 2286 lm 22W: 2794 lm    25W: 3175 lm
Dimmable	0-10V

### Mechanical Specifications


IP Rating	IP20
Material	Steel + PC
Lens	Frosted
Net Weight	2.72 kg
Product size (mm)	$\pm 584.2 \times 49.6 \times 50.8$ mm
Product size (inch)	$\pm 23.98 \times 2.56 \times 2.62$ in
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 45°C
Lifespan (L70)	54 000 hours

## Product Description:

- Large supply voltage range 120-347V.
- Selectable CCT 3500K / 4000K / 5000K.
- Selectable power 15W / 18W / 22W / 25W.
- Easy Installation with fast connection design, shorten the installation process and save labor cost.
- Save up in electricity consumption compared to fluorescent lighting fixture.
- Warranty: 5 years.
- It could be fitted with sensor.
- Ceiling installation or optional suspension kit, not included.
- Optional protective grid, not included.

## Applications:

Suitable for houses, basements, warehouses, garages, shops, etc.

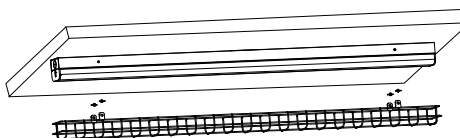

[info@technilight.ca](mailto:info@technilight.ca)

**WWW.TECHNILIGHT.CA**