


TLT5B4F24N

IP20

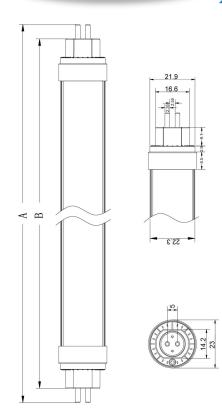

Specifications TLT5B4F24N

Electrical Specifications	
Model No.	TLT5B4F24N
DLC ID	PL8QH5J8OGU5
Power (W) ± 10%	24 W
Input Voltage (V)	AC120-277V, 50/60Hz
Efficacy ± 3%	181.88 lm/W
Power Factor (PF)	0.9
Total harmonic distortion	15%

Photometric Specifications	
CRI	80
CCT	4 000 K
Beam angle	140°
Light Output ± 3%	4 288.8 lm
Dimmable	No

Aluminum + PC
Frosted
1162 x 23 mm
± 48 x 7/8 inch
10% - 90%
-40°C ~ 40°C
>50 000 hours



Product Description:

- 1. Compatible with enclosed luminaire.
- 2. Perfect replacement for the whole set of T5 fluorescent lighting fixture.
- 3. Soft and uniform light. No glare and no flickering.
- 4. Approximately 50% economy on electricity consumption compared to fluorescent lighting fixture.
- 5. "Type B". Direct supply, double-ended, 120 to 277 VAC.
- 6. Warranty: 5 Years.
- 7.5000 K available.

Applications:

Fluorescent T5 tubes replacement.



info@technilight.ca

WWW.TECHNILIGHT.CA