



Ceiling mounted

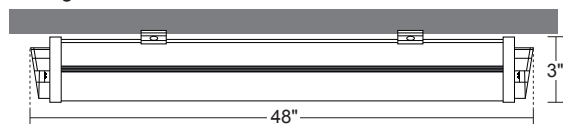

Suspension

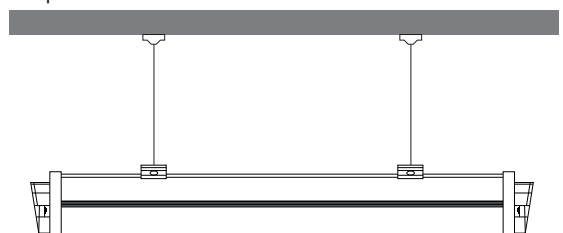

Connected in series: MAXIMUM wattage for one line: 120V: 750W | 240V: 1 300W | 277V: 1 350W



Not included options



TLTP6PC
6' power cable



TLTP6AC
6' junction box cable



TLTP6CC (6') ou TLTP12CC (12')
Interconnection cable



TLTPSR
4' suspension kit

Pictures for illustration purpose only

Specifications TLTP4F50P

Electrical Specifications

Model No.	TLTP4F50P
Power (W) $\pm 10\%$	50 W (DLC: 50.56 W)
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy	120.79 lm/W
Power Factor (PF)	0.91

Photometric Specifications

CRI	82.9
CCT	5 000 K
Beam angle	120°
Light Output	6 107 lm
Dimmable	No

Mechanical Specifications

IP Rating	IP65
Material	Aluminum
Lens	Frosted
Net Weight	2.1 kg
Product size (mm)	1 200 x 78 x 93 mm
Product size (inch)	$\pm 48 \times 3 \times 3\text{-}5/8$ in
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C



Product Description:

1. Lightweight body material, corrosion resistant, waterproof and dustproof.
2. Instant illumination, no flicker, no buzz.
3. Easy installation. Interconnection and power cables available.
4. Save up to 60% in electricity consumption compared to fluorescent lighting fixture.
5. Warranty: 5 Years.

Applications:

Suitable for warehouse, wet locations etc.

Similar products	Color	W	Lumen
TLTP4F50N	4 000 K	50 W	6 023 lm

info@technilight.ca

WWW.TECHNILIGHT.CA