


Explosion proof

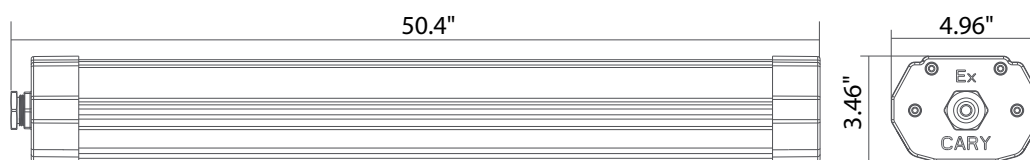

Specifications TLVPE4F36P

Electrical specifications

Model No.	TLVPE4F36P
Power (W) ± 10%	36 W
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy ± 3%	108 lm/W
Power Factor (PF)	0.9
Surge protection	4 kv

Photometric specifications

CRI	74
CCT	5 000 K
Beam angle	N/D
Light Output ± 3%	3 888 lm
Dimmable	Non

Mechanical specifications

IP Rating	IP66
Material	Aluminum + PC
Lens	Frosted
Net Weight	7.2 kg
Product size (mm)	1 270 x 101.6 x 76.2 mm
Product size (inch)	± 50.4 x 4.96 x 3.46 in
Operating Humidity	N/D
Operating Temperature	-40°C ~ 55°C
Lifespan	50 000 hours

Product description:

- CLASS 1 - DIVISION 2 - GROUP A, B, C, D
CLASS 2 - DIVISION 2 - GROUP F, G
CLASS 3
- No toxic chemicals. Complies with ROHS directives.
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Yellow.

Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.
Designed for wet locations.
Indoor and outdoor.