

Specifications TLWMBU40ABK

Electrical Specifications


Model No.	TLWMBU40ABK
DLC ID	PLDQ0F6SCVT7
Power (W) $\pm 10\%$	40 W (DLC: 40.52 W)
Input Voltage (V)	AC 120/347V, 50/60Hz
Efficacy $\pm 3\%$	124.01 lm/W
Power Factor (PF)	0.937
Surge protection	4 Kv
Total harmonic distortion	$\geq 10\%$

Photometric Specifications

CRI	72.4
CCT adjustable	3000K / 4000K / 5000K
Beam angle	Type II
Light Output $\pm 3\%$	5 024.6 lm
Dimmable	0-10V

Mechanical Specifications

IP Rating	IP65
Material	Aluminum
Lens	Polycarbonate
Net Weight	2.16 kg
Product size (mm)	$\pm 216 \times 281 \times 112$ mm
Product size (inch)	$\pm 8.5 \times 11.05 \times 4.41$ in
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 45°C
Lifespan (L70)	60 000 hours

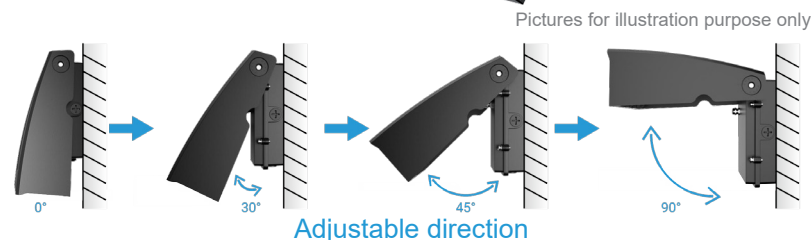

Product Description:

- Large supply voltage range 120-347V.
- 3000K / 4000K / 5000K adjustable CCT.
- Adjustable direction from 0 to 90 degrees.
- Die cast aluminum housing provides solid mounting to wall.
- Optional photocell.
- Save on electricity consumption compared to fluorescent lighting fixture.
- Color: black.
- Warranty: 5 Years.
- It could be fit with sensor.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, etc.